




SERIES A-0702F

Circuit Breaker | Overload Protector | No-Fuse Breaker

Sang Mao



DIMENSION IN mm

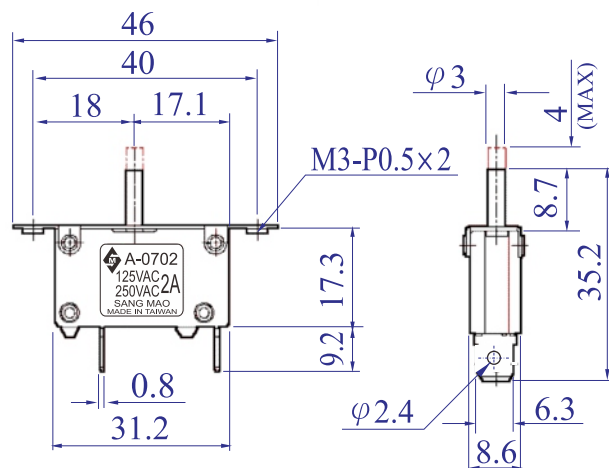

SPECIFICATIONS:

DERATING FACTOR		
TEMP	1A ~ 10A	11A ~ 20A
60°C	--	× 0.50
55°C	--	× 0.55
50°C	× 0.50	× 0.65
45°C	× 0.55	× 0.70
40°C	× 0.68	× 0.80
35°C	× 0.80	× 0.85
30°C	× 0.86	× 0.88
25°C	× 1.00	× 1.00
20°C	× 1.11	× 1.10
15°C	× 1.20	× 1.20
10°C	× 1.35	× 1.30

(FOR REFERENCE ONLY)

MAX. INTERNAL RESISTANCE	
1.0A- 1.5A	0.500 Ω
2.0A- 2.5A	0.320 Ω
3.0A- 4.0A	0.100 Ω
5.0A- 6.0A	0.050 Ω
7.0A- 9.0A	0.020 Ω
10.0A-12.0A	0.016 Ω
13.0A-16.0A	0.012 Ω
17.0A-20.0A	0.012 Ω

- * STANDARD RATING: **1-20 AMPERE**.
- * INPUT POWER: **12 VDC / 125 VAC / 250 VAC**
- * DIELECTRIC STRENGTH: **1500 VAC / 1 MINUTE**
- * RATED CONDITIONAL SHORT-CIRCUIT CURRENT : **IEC-934 "PC.1 1000A" WITH "FUSE 16 A gL/gG"**
- * INSULATION RESISTANCE : **> 100 MΩ**
- * CALIBRATION :
 - 25°C - **100%** OF RATED CURRENT - CONTINUOUSLY CARRIED.
 - 25°C - BETWEEN **101% TO 170%** - MAY TRIP OR NOT.
 - 25°C - **175%** OF RATED CURRENT - TRIP **WITHIN 1 HOUR**.
 - 25°C - **200%** OF RATED CURRENT - TRIP **WITHIN 1 MINUTE**
- * CONTACT ENDURANCE: **125VAC × 150% OF RATED CURRENT - 500 CYCLES.**
- * **IEC - 934** METHOD OF OPERATION : "**R**" = **AUTOMATIC INTER- RUPTION AND NON-AUTOMATIC (MANUAL) RESETING .**
- * **IEC - 934** METHOD OF TRIPPING : "**TO**" = **THERMAL .**
- * DEGREE OF TRIP - FREE BEHAVIOUR : "**CYCLING TRIP - FREE**"
- * RESET: **MANUAL PUSH RESET**

APPROVALS :

CSA APPROVAL: **2 - 15A** 125VAC ,60Hz TC2,OL0,SC:C1,1kA,125VAC
CSA c/us APPROVAL: **2 - 15A** 125VAC / 60Hz

APPLICATIONS:

- * TABLE SAW
- * GENERATOR
- * BATTERY CHARGER
- * SCREW DRIVER

